


STEEL STRAPPING TOOL

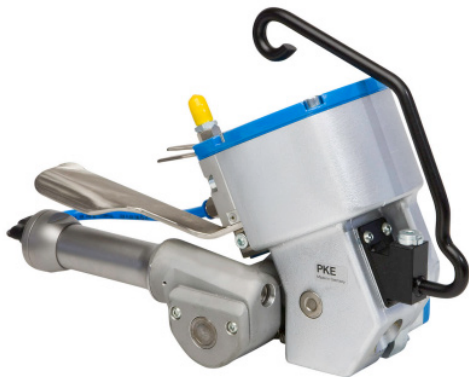

SEAL-LESS JOINT PKE-HD

The PKE-HD, is a hand-held tool that combines the key features of the E-Series with a comfortable, fully pneumatic function and specialisation in straps of 19 mm width. The sealless joint with three notches established by TITAN holds together what belongs together.

Technical Data

Kind of drive (tensioning)	Pneumatic
Tension force	up to 7,000 N
Strap feeding speed	0.15 m/s 0.5 ft/s
Kind of drive (sealing)	Pneumatic
Dimensions	390 x 150 x 270 mm (L x W x H) 390 x 163 x 270 mm (L x W x H) (PKE-HD) 15.4 x 5.9 x 10.6" (L x W x H) 15.4 x 6.4 x 10.6" (L x W x H) (PKE-HD)
Weight	11.5 kg 11.4 kg (PKE-HD) 25.3 lb 25.1 lb (PKE-HD)
Air pressure	min. 5 bar flow pressure (for 19 x 0,63 mm MEGABAND®) max. 6 bar flow pressure min. 5 bar flow pressure (for 3/4" x 0.025" MEGABAND®) max. 6 bar flow pressure
Air consumption (during tensioning)	0.6 m ³ / min. 21.18 ft ³ / min.
Cross-section	information currently not available
Handarm vibration	< 2.5 m/s ²
Noise level	78 dB (A)

Strap/Joint

Type of strap	Steel strap
Strap	Automatenband MEGABAND® Megaflex
Strap width	19 mm 3/4"
Strap thickness	0.60 - 0.80 mm (for Automatenband, Megaflex) 0.63 - 0.80 mm (for MEGABAND®) 0.024 - 0.031" (for Automatenband, Megaflex) 0.025 - 0.031" (for MEGABAND®)
Kind of seal	Sealless-joint
Sealing strength (depending on strap quality, strap dimensions)	approx. 75% of the strap breaking load

Minimum Bearing Area

Flat package	150 mm 5.9"
--------------	-------------

Application

Strapping of flat packages (e.g. palletized goods) for stationary use.
--

Factory Address
Plot No. G28 & G29, General Park IP,
Sultanpur Medical Devices Park,
Telangana 502 319

Corporate Address
Shantha Jubilee, Jubilee Enclave, HITEC City,
Hyderabad, Telangana 500 081

Contact +91 93939 22442
E-mail info@acmeirm.com
Website www.mvsips.com