


# STEEL STRAPPING TOOL

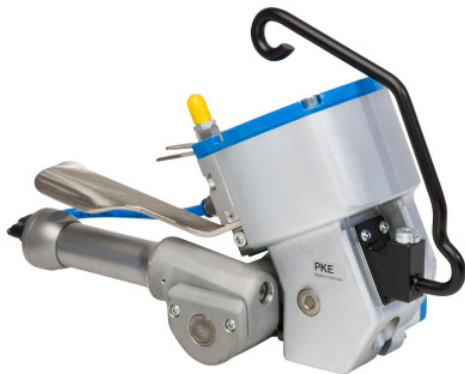

## SEAL-LESS JOINT PKE

The PKE is a fully pneumatic hand-held tool that allows all-round easy use for both tensioning and joining. This makes it the ideal stationary device for high strapping rates. It is possible to join steel straps preferably on flat packages with PKE using a tensioning force of up to 7,000 N without seals.

### Technical Data

Kind of drive (tensioning)	Pneumatic
Tension force	up to 7,000 N
Strap feeding speed	0.15 m/s 0.5 ft/s
Kind of drive (sealing)	Pneumatic
Dimensions	390 x 150 x 270 mm (L x W x H) 390 x 163 x 270 mm (L x W x H) (PKE-HD) 15.4 x 5.9 x 10.6" (L x W x H) 15.4 x 6.4 x 10.6" (L x W x H) (PKE-HD)
Weight	11.5 kg 11.4 kg (PKE-HD) 25.3 lb 25.1 lb (PKE-HD)
Air pressure	min. 5 bar flow pressure (for 19 x 0,63 mm MEGABAND®) max. 6 bar flow pressure min. 5 bar flow pressure (for 3/4" x 0.025" MEGABAND®) max. 6 bar flow pressure
Air consumption (during tensioning)	0.6 m <sup>3</sup> / min. 21.18 ft <sup>3</sup> / min.
Cross-section	information currently not available
Handarm vibration	< 2.5 m/s <sup>2</sup>
Noise level	78 dB (A)

### Strap/Joint

Type of strap	Steel strap
Strap	Automatenband MEGABAND® Megaflex
Strap width	13, 16, 19 mm 1/2", 5/8", 3/4"
Strap thickness	0.50 - 0.80 mm (for Automatenband, Megaflex) 0.50 - 0.63 mm (for MEGABAND®) 0.02 - 0.031" (for Automatenband, Megaflex) 0.02 - 0.025" (for MEGABAND®)
Kind of seal	Sealless-joint
Sealing strength (depending on strap quality, strap dimensions)	approx. 75% of the strap breaking load

### Minimum Bearing Area

Flat package	150 mm 5.9"
--------------	-------------

### Application

Strapping of flat packages (e.g. palletized goods) for stationary use
---

**Factory Address**  
Plot No. G28 & G29, General Park IP,  
Sultanpur Medical Devices Park,  
Telangana 502 319

**Corporate Address**  
Shantha Jubilee, Jubilee Enclave,HITEC City,  
Hyderabad, Telangana 500 081

**Contact** +91 93939 22442  
**E-mail** info@acmeirm.com  
**Website** www.mvsips.com