


# STEEL STRAPPING TOOL

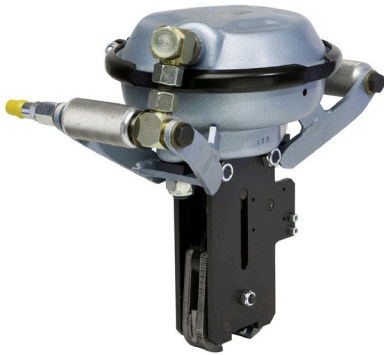

## CRIMP JOINT (SINGLE NOTCH) **SCR**

The SCR, a pneumatic hand-held sealer for joining steel straps with crimp seals with one crimping, works in conjunction with the tensioner PLC. Crimp seals stands for absolute reliability in heavy goods transport, particularly in freight transport by sea and rail.

### Technical Data

Kind of drive (sealing)	Pneumatic
Seal (Type)	NCR
Dimensions	300 x 370 x 350 mm (L x W x H) 11.8 x 14.6 x 13.8" (L x W x H)
Weight	10 kg 22.0 lb
Air pressure	max.7 bar flow pressure
Air consumption(sealing)	10 NI / Crimp stroke

### Strap/Joint

Type of strap	Steel strap
Strap	MEGABAND® special
Strap width	32 mm 1 1/4"
Strap thickness	0.80 mm (for H-strap) 1.12 mm (for HH-strap) 1.27 mm (for HHH-strap) 1.45 mm (for HHH-M-strap) 0.031" (for H-strap) 0.044" (for HH-strap) 0.050" (for HHH strap) 0.057" (for HHH-M-strap)
Kind of seal	Crimp-joint (single notch)
Sealing strength (depending on strap quality, strap dimensions)	up to 85 - 95% of the strap breaking load

### Application

Lashing & Lifting: for load securing for rail and sea transport  
Strapping of e.g. steel coils, wood or cellulose, etc.

#### Factory Address

Plot No. G28 & G29, General Park IP,  
Sultanpur Medical Devices Park,  
Telangana 502 319

#### Corporate Address

Shantha Jubilee, Jubilee Enclave, HITEC City,  
Hyderabad, Telangana 500 081

Contact +91 93939 22442

E-mail info@acmeirm.com

Website www.mvsips.com