

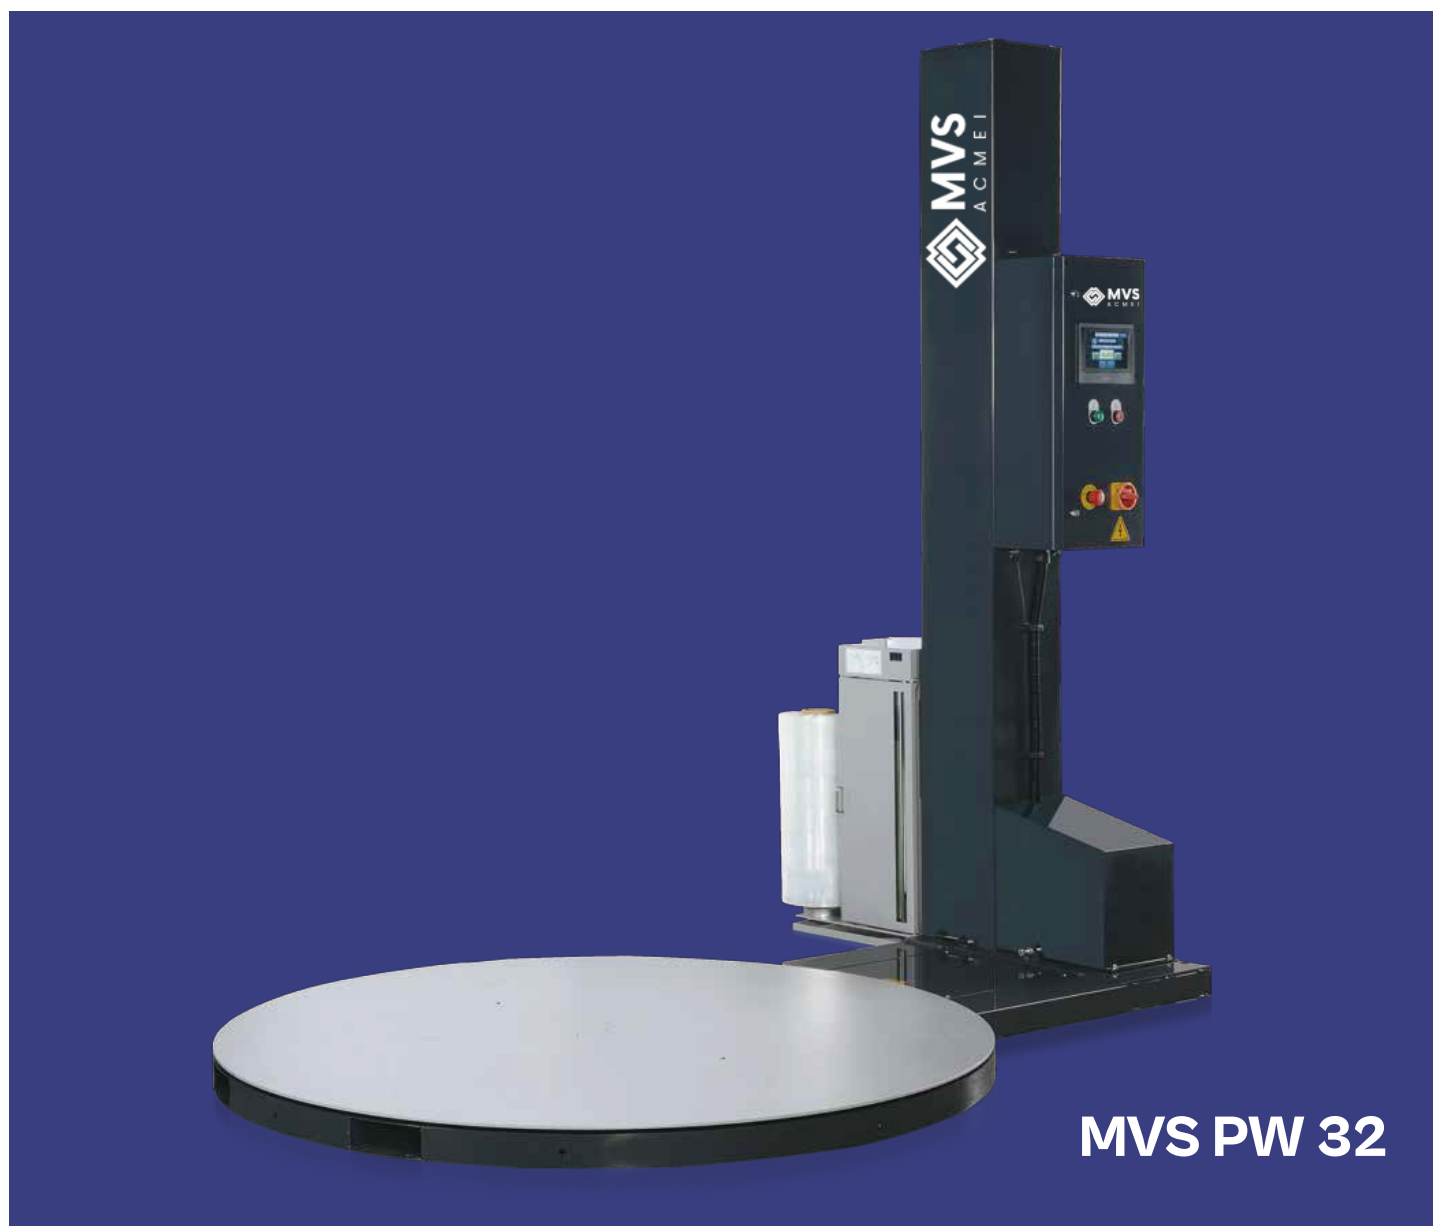
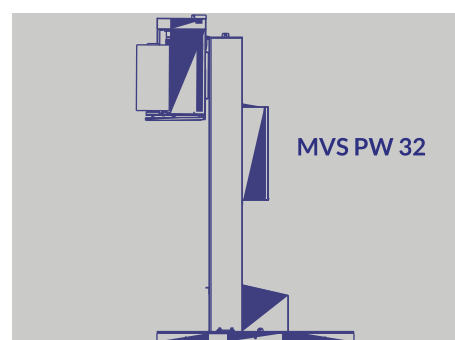


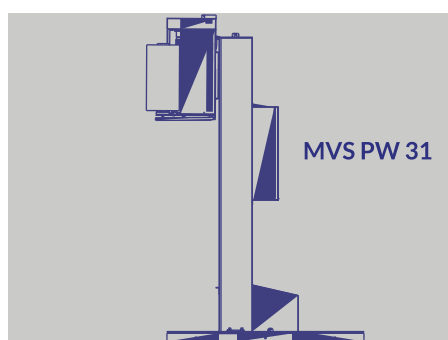

TMD SERIES

I TMD - Series

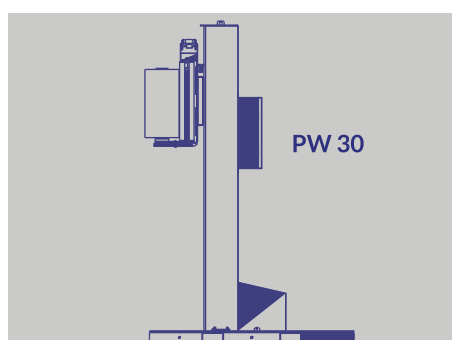



PW 30

Major Features

- Adjustable Spring Brake With Quick Release
- Turntable Home Position
- Slow Start And Stop
- One Touch Automatic Program
 - 3 Bottom Wraps And 2 Top Wraps
 - 4 Bottom Wraps And 3 Top Wraps
- Safety Switch To Prevent From Foot Pinch
- Height Detection By Photo Sensor

Standard Specification

- Wrapping Height: 2.2m (Available On 2.6m & 3.0m)
- Turntable Speed: 10 Rpm
- Loading Weight : 1500 kg
- Turntable Diameter: 1.5m (Available On 1.65m Loading Weight 1650 kg)
- Power Supply: 100v, 110v, 220v, 230v, 240v & 1-phase
- Power Consumption: 0.8kw

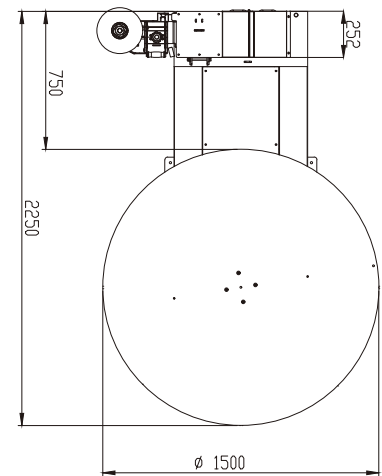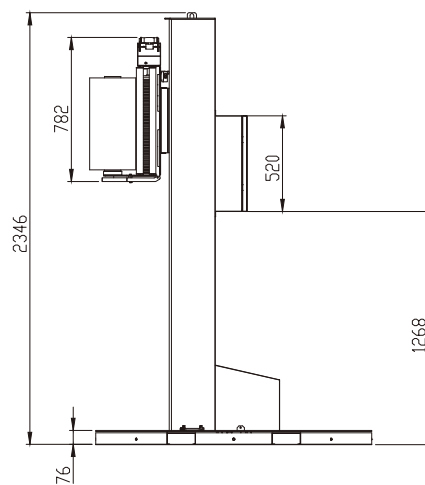



MVS PW 31

Major Features

- 300% Power Pre-stretch: 1 Meter Film Pre-stretch To Be 4 Meters
- Home Position: The Turntable Always Stops At The Same Position
- One Touch Automatic Program
- Top Bottom Wraps Selector
 - 3 Bottom Wraps And 2 Top Wraps
 - 4 Bottom Wraps And 3 Top Wraps
- Height Detection By Photo Sensor
- Advanced Soft Wrapping Device On The Package Angle
- Adjustable Wrapping Tension Slow Start and Stop

Standard Specification

- Wrapping Height: 2.2m (Available On 2.6m & 3.0m)
- Turntable Speed: 12 Rpm
- Loading Weight: 1650kg
- Turntable Diameter: 1.5m (Available On 1.65m Loading Weight 1650kg)
- Power Supply: 100v, 110v, 220v, 230v, 240v & 1-Phase
- Power Consumption: 1.2kw

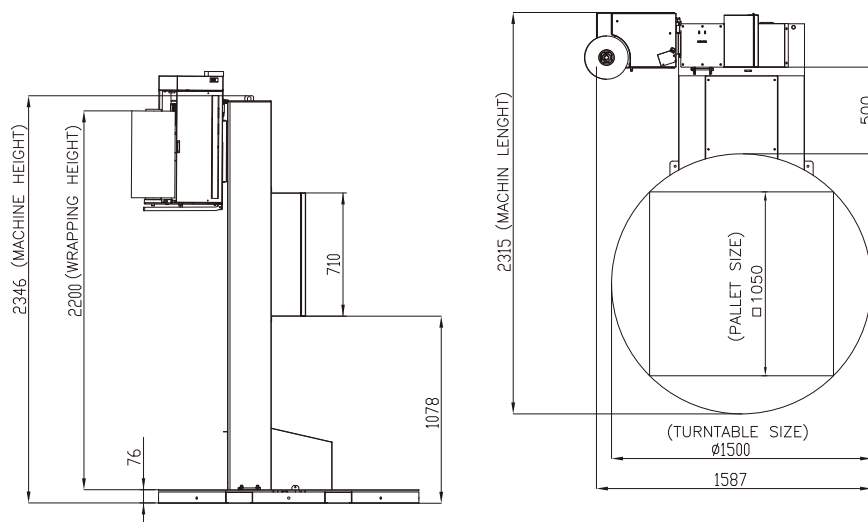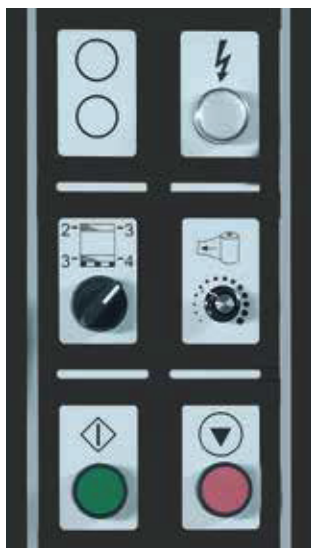

MVS PW 32

Major Features

- Lcd Touch Screen Control Panel (Same As European No.1 Brand)
- 300% Power Pre-stretch with Quick Gear Change
- Turntable Home Position
- Slow Start and Stop
- Choices Of Automatic/manual Mode
- Adjustable Top And Bottom Wrap Counts
- Adjustable Wrapping Tension (5 Stages)
- Adjustable Turntable/carriage Speed
- Adjustable Reinforcing Wrapping
- Top Sheet Wrapping
- 3 Memory Modes - Operator Self Program
- Password Protected Control Panel
- Trouble Shooting Shown On Screen
- Advance Soft Wrapping
- One Way Idel Roller To Allow Film Tail Stay Outside Of Carraige When Break
- Safety Switch To Prevent Foot Pinch
- Carriage Anti-falling Device
- Height Detection By Photo Sensor



Standard Specification

- Wrapping Height: 2.2m (Available On 2.8m & 3.0m)
- Turntable Speed: 12 Rpm
- Loading Weight: 1850kg
- Turntable Diameter: 1.5m (Available On 1.85m - 1850kg Loading)
- Power Consumption: 1.2kw
- Power Supply: 100v, 110v, 220v, 230v, 240v & 1-Phase



▲ COLOR TOUCH SCREEN

The control panel presents MVS technology in film performance control in MVS PW 32.

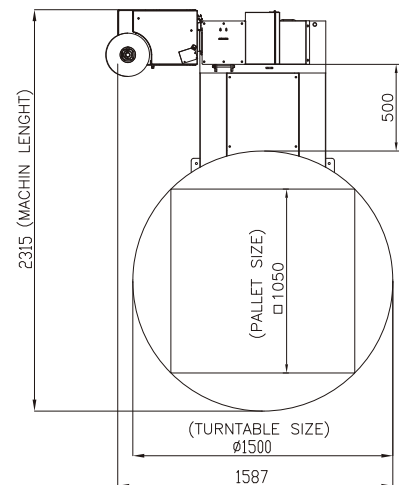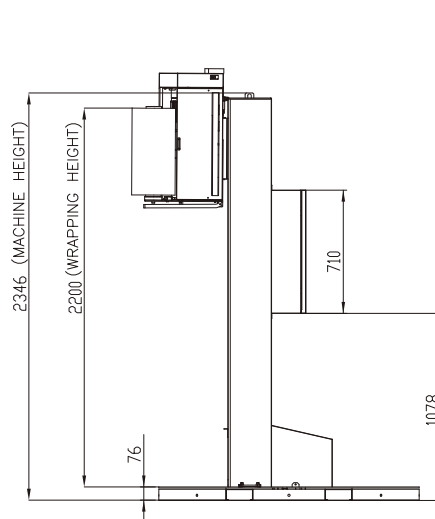

OPTION



Aphotocell Sensor For Black Film



Ramp



Horse Shoe (MVS PW 32)



Roping (MVS PW 31, MVS PW 32)



Factory Address
Plot No. G28 & G29, General Park IP,
Sultanpur Medical Devices Park,
Telangana 502 319

Corporate Address
Shantha Jubilee, Jubilee Enclave,
HITEC City, Hyderabad,
Telangana 500 081

Contact +91 93939 22442
E-mail info@acmeirm.com
Website www.mvsips.com

